

IV B.Tech II Semester Regular/Supplementary Examinations, April - 2018  
**DIGITAL CONTROL SYSTEMS**  
 (Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70

*Question paper consists of Part-A and Part-B*

*Answer ALL sub questions from Part-A*

*Answer any THREE questions from Part-B*

\*\*\*\*\*

**PART-A** (22 Marks)

1. a) Define the following fundamental parameters of an sample and hold element  
 (i) Acquisition time (ii) Aperture time (iii) Droop rate [3]
- b) Obtain the Z-transform of  $x(t) = \frac{1}{a}(1 - e^{-at})$ , where 'a' is a constant [4]
- c) Write about the Jordan canonical form. [3]
- d) Determine the stability of the characteristic equations by using Jury's stability tests  $5z^2 - 2z + 2 = 0$ . [4]
- e) What do understand by primary strip and complimentary strips? [4]
- f) Enumerate the design steps for pole placement. [4]

**PART-B** (3x16 = 48 Marks)

2. a) Discuss the mathematical model of sample and hold operations with neat sketch? [8]
- b) Explain the conditions to be satisfied for reconstruction of sampled signal into continuous signals? [8]
3. a) Given the z transform  $X(z) = \frac{(1 - e^{-aT})}{(z-1)(z - e^{-aT})}$  Where a is a constant and T is the sampling period, determine the inverse z transform  $x(kT)$  by use of the partial fraction expansion method. [8]
- b) The input output of a sampled data system is described by the difference equation  $y(k+2) + 3y(k+1) + 4y(k) = r(k)$ . Determine the pulse transfer function, the initial conditions are  $y(0) = 0, y(1) = 1$ . [8]
4. Consider the discrete control system represented by the following transfer function  $G(z) = \frac{1+0.8z^{-1}}{1-z^{-1}+0.5z^{-2}}$ . Obtain the state representation of the system in the observable canonical form. Also find its state transition matrix. [16]
5. a) How do you map constant damping loci from s-plane to z-plane? [6]
- b) Construct the Jury stability table for the following characteristic equation  $P(z) = a_0z^4 + a_1z^3 + a_2z^2 + a_3z + a_4$  Where  $a_0 > 0$ . Write the stability conditions. [10]

6. The closed loop transfer function for the digital control system is given as

$$\frac{C(z)}{R(z)} = \frac{z + 0.5}{3(z^2 - z + 0.5)}$$

Find the steady state errors and error constants due to step input.

[16]

7. Control a system, defined by  $\dot{X} = Ax + Bu$   $Y = Cx$

Where  $A = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix}$ ,  $B = \begin{bmatrix} 0 \\ 2 \end{bmatrix}$ ,  $C = [1 \ 0]$ , It is desired to have eigen values at -3.0 and -5.0 by using a state feedback control  $u = -KX$ . Determine the necessary feedback gain matrix  $k$  and the control signal  $u$ .

[16]

IV B.Tech II Semester Regular/Supplementary Examinations, April - 2018

**DIGITAL CONTROL SYSTEMS**

(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70

*Question paper consists of Part-A and Part-B**Answer ALL sub questions from Part-A**Answer any THREE questions from Part-B*

\*\*\*\*\*

**PART-A (22 Marks)**

1. a) What are the advantages offered by digital control? [4]
- b) Obtain the Z-transform of  $x(t) = t^2 e^{-at}$  where 'a' is constant. [4]
- c) Write about the observable canonical form. [3]
- d) Determine the stability of the characteristic equations by using Jury's stability tests  $z^3 - 0.2z^2 - 0.25z + 0.05 = 0$ . [4]
- e) Write brief note on design procedure in the w-plane. [5]
- f) Write the sufficient condition for arbitrary pole placement. [2]

**PART-B (3x16 = 48 Marks)**

2. a) State and explain the theorem required to satisfy to recover the signal  $e(t)$  from the samples  $e^*(t)$ . [8]
- b) Explain how the reconstructing the input signal by hold circuits. [8]
3. Obtain the inverse Z-transform of the following in the closed form.
 

(i) $F_1 = \frac{0.368z^2 + 0.478z + 0.154}{z^2(z-1)}$	(ii) $F_2 = \frac{2z^3 + z}{(z-1)^2(z-1)}$	(iii) $F_3 = \frac{z+2}{z^2(z-2)}$
--	--	------------------------------------

 [16]
4. a) Explain any one method of evaluation of state transition matrix. [6]
- b) Investigate the controllability and observability of the following system.
 
$$\begin{pmatrix} x_1(k+1) \\ x_2(k+1) \end{pmatrix} = \begin{pmatrix} 1 & -2 \\ 1 & -1 \end{pmatrix} \begin{pmatrix} x_1(k) \\ x_2(k) \end{pmatrix} + \begin{pmatrix} 1 & -1 \\ 0 & 0 \end{pmatrix} u(k)$$

$$\begin{pmatrix} y_1(k) \\ y_2(k) \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \begin{pmatrix} x_1(k) \\ x_2(k) \end{pmatrix}$$
 [10]
5. a) Discuss the stability analysis of discrete control system using modified Routh stability. [8]
- b) Using Jury's stability criterion, determine the stability of the following discrete time systems (i)  $z^3 + 3.3z^2 + 4z + 0.8 = 0$  (ii)  $z^3 - 1.1z^2 - 0.1z + 0.2 = 0$  [8]

6. a) Consider the transfer function system shown in figure 6(a). The sampling period T is assumed to be 0.1 sec. obtain  $G(w)$ .

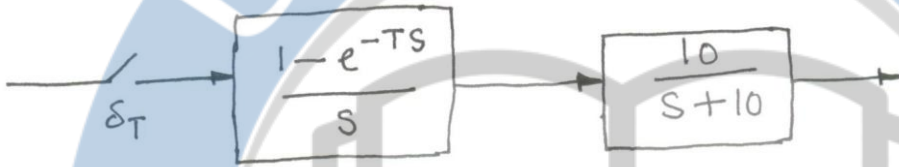


Figure 6 (a)

[8]

- b) List out the transient response specifications and explain in brief.

[8]

7. A discrete time regulator system has the plant equation

$$X(k+1) = \begin{bmatrix} 2 & -1 \\ -1 & 1 \end{bmatrix} X(k) + \begin{bmatrix} 4 \\ 3 \end{bmatrix} u(k)$$

$$Y(k) = [1 \quad 1] X(k) + 7u(k)$$

Design a state feedback control algorithm with  $u(k) = -KX(k)$  which places the closed loop characteristic root at  $\pm j0.5$ .

[16]

IV B.Tech II Semester Regular/Supplementary Examinations, April - 2018

**DIGITAL CONTROL SYSTEMS**  
(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70

*Question paper consists of Part-A and Part-B*

*Answer ALL sub questions from Part-A*

*Answer any THREE questions from Part-B*

\*\*\*\*\*

**PART-A** (22 Marks)

1. a) Illustrate the step motor control system examples of discrete data control systems. [4]
- b) Find the z-transforms of  $f(t) = t \sin(\omega t)$ . [4]
- c) State the state transition matrix. [3]
- d) Determine the stability of the characteristic equations by using Jury's stability tests  $z^4 - 1.7z^3 + 1.04z^2 - 0.268z + 0.024 = 0$ . [4]
- e) Write the design procedure of lag compensator in w-plane. [4]
- f) What do you mean by state feedback controller? [3]

**PART-B** (3x16 = 48 Marks)

2. a) Explain the examples of data control systems of the following [8]
  - (i) Microprocessor controlled system
  - (ii) A digital computer controlled rolling mill regulating system.
- b) Draw the frequency domain characteristics of zero order hold? Explain with necessary mathematical equations. [8]
3. a) Obtain the inverse z-transform of the following [8]
  - (i)  $X(z) = \frac{z^{-3}}{(1-z^{-1})(1-0.2z^{-1})}$  and (ii)  $X(z) = \frac{z^{-1}(1-z^{-2})}{(1+z^{-2})^2}$
- b) Write the difference equation governing the system for  $G(s) = \frac{1}{s+1}$  as shown in figure.3 (b)

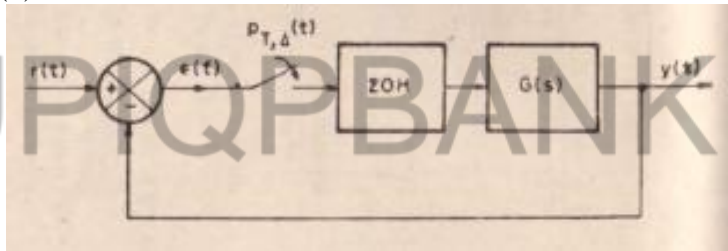


Figure.3 (b)

4. a) Obtain the Jordan canonical form realization for the following transfer function [8]
 
$$G(z) = \frac{3z^2 - 4z + 6}{(z - \frac{1}{3})^3}$$
- b) Consider the following pulse transfer function [8]
 
$$\frac{Y(z)}{U(z)} = \frac{z + 0.2}{(z + 0.8)(z + 0.2)}$$
 Check this system is completely state controllable or not?

5. Consider the sample-data system shown in Figure.5 and assume its sampling period is 0.4 Sec. Find the range of  $K$ , so that the closed - loop system for which stable.

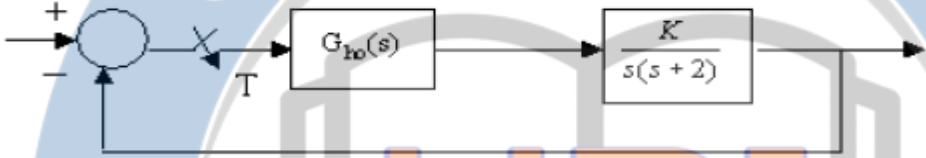


Figure.5

[16]

6. The open loop transfer function of a unity - feedback digital control system is given as  $(z) = \frac{K(z^2+0.8z+0.5)}{(z-1)(z^2-z+0.2)}$ . Sketch the root loci of the system for  $0 < K < \infty$ . Indicate all important information on the root loci.

[16]

7. Consider the system defined by

$$\dot{X} = Ax + Bu$$

$$A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -1 & -5 & -6 \end{bmatrix}, B = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

by using the state feedback control  $u = -Kx$ , it is desired to have the closed loop poles at  $s = -2 \pm j 4$  and  $s = -10$ . Determine the state feedback gain matrix  $K$ .

[16]

UPIQP.BANK.COM

IV B.Tech II Semester Regular/Supplementary Examinations, April - 2018

**DIGITAL CONTROL SYSTEMS**

(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70

*Question paper consists of Part-A and Part-B**Answer ALL sub questions from Part-A**Answer any THREE questions from Part-B*

\*\*\*\*\*

**PART-A (22 Marks)**

1. a) Explain the digital controller for a turbine and generator examples of discrete data control systems. [4]
- b) Find the z transform of  $x(k) = \sum_{h=0}^k a^h$  where 'a' is a constant. [4]
- c) Write about the controllable canonical form. [3]
- d) Enumerate the conclusions from the general mapping between the s and z planes by the z transform. [4]
- e) Write the design procedure of lead compensator in w-plane. [4]
- f) Write the necessary conditions for arbitrary pole placement. [3]

**PART-B (3x16 = 48 Marks)**

2. a) Draw the magnitude and phase curves of the zero order hold and compare these curves with those of the ideal low pass filter? [8]
- b) Explain the problems encountered in reconstructing e(t) from its samples. [8]
3. a) By using the inversion integral method, obtain the inverse z transform of 
$$X(k) = \frac{1 + 6z^{-2} + z^{-3}}{(1 - z^{-1})(1 - 0.2z^{-1})}$$
 [8]
- b) Write the difference equation governing the system for  $G(s) = \frac{1}{s^2}$  as shown in figure.3 (b).

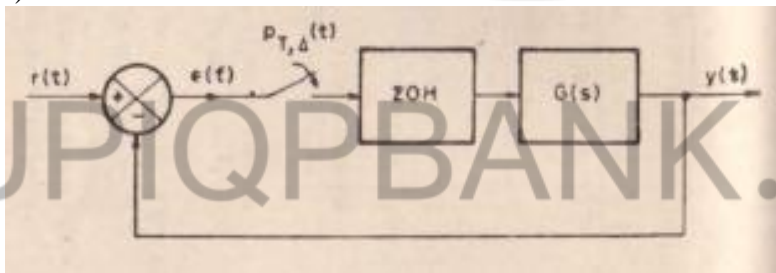


Figure.3(b)

4. a) Write the following state space representation of discrete time systems
  - (i) Observable canonical form
  - (ii) Jordan canonical form
 [6]
- b) Obtain the state transition matrix of the following discrete time system  $x(k+1) = Gx(k) + Hu(k)$   
 $y(k) = Cx(k)$  Where  $G = \begin{bmatrix} 0 & 1 \\ -0.16 & -1 \end{bmatrix}$ ,  $H = \begin{bmatrix} 1 \\ 1 \end{bmatrix}$ ,  $C = [1 \ 0]$   
 Then obtain the state  $x(k)$  and output  $y(k)$  when the input  $u(k)=1$  for  $k=0,1,2,\dots$  [10]

5. a) Determine  $F(z)|_{z=e^{sT}}$  in terms of  $F(s)$ . Using this result, explain the relationship between the  $z$ -plane and the  $s$ -plane. [8]
- b) Use the Routh-Hurwitz criterion to find the stable range of  $K$  for the closed loop unity feedback system with loop gain  $F(z) = \frac{K(z-1)}{(z-0.1)(z-0.8)}$ . [8]

6. Consider the digital control system shown in figure 6, plot the root loci as the gain  $K$  is varied from 0 to  $\infty$ . Determine the critical value of gain  $K$  for stability. The sampling period is 0.1 sec, or  $T=0.1$ . What value of gain  $K$  will yield a damping ratio  $\zeta$  of the closed loop poles equal to 0.5? With gain  $K$  set to yield  $\zeta=0.5$ , determine the damped natural frequency  $\omega_d$  and the number of samples per cycle of damped sinusoidal oscillation.

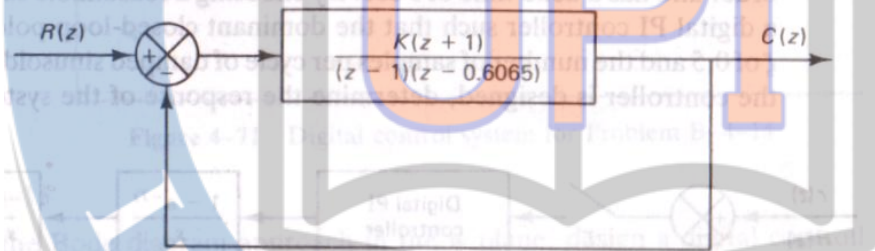


Figure.6

[16]

7. a) Discuss the necessary conditions for design of state feedback controller through pole placement. [9]
- b) Prove Ackermann's formula for the determination of the state feedback gain. [7]