

II B. Tech II Semester Regular Examinations, April/May – 2016

CONTROL SYSTEMS

(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70

- Note: 1. Question Paper consists of two parts (**Part-A** and **Part-B**)
 2. Answer **ALL** the question in **Part-A**
 3. Answer any **THREE** Questions from **Part-B**

PART -A

1. a) State and explain the Mason's gain formula
- b) Define steady state error
- c) What is the necessary condition that the characteristic equation of a feedback system satisfies the BIBO stability?
- d) State the Nyquist Stability criterion
- e) Why bode plots are commonly used in the frequency domain design
- f) What are the properties of STM

PART -B

2. a) Explain the reduction of parameter variation by feedback.
- b) Using block diagram reduction technique finds the transfer function for the system shown in below Figure



3. a) What is meant by step, ramp, parabolic and impulse inputs
- b) The open-loop transfer function of a control system with unity feedback is

$$G(s) = \frac{150}{s(1 + 0.25s)}$$

- i) Evaluate the error series for the system
- ii) Determine the steady state error for an input $r(t) = (1+t^2)u(t)$

4. a) Explain the construction rules for root locus technique
- b) Test the stability of the system with the following characteristic equation by Routh's test $s^6 + 2s^5 + 8s^4 + 20s^2 + 16s + 16 = 0$

5. a) Explain frequency domain specifications.
b) A unity feedback control system has an open loop transfer function given by $G(s)$

$$H(s) = \frac{100}{s(s+5)(s+2)}. \text{ Draw Nyquist diagram and determine stability.}$$

6. For the given open loop transfer function, $G(s) = \frac{K}{s(s+4)(s+6)}$.

Design suitable lead compensation so that phase margin is $\geq 40^\circ$ and velocity error constant, $K_v \geq 20$.

7. a) List out the advantages of state space techniques
b) Determine the state model of the system for the following transfer function

$$\frac{Y(s)}{U(s)} = \frac{2s^2 + s + 5}{s^3 + 6s^2 + 11s + 4}$$

UPIQP BANK.COM



II B. Tech II Semester Regular Examinations, April/May – 2016

CONTROL SYSTEMS

(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70


- Note: 1. Question Paper consists of two parts (**Part-A** and **Part-B**)
 2. Answer **ALL** the question in **Part-A**
 3. Answer any **THREE** Questions from **Part-B**

PART -A

1. a) How the control systems are classified
- b) Define steady state response
- c) When does the procedure for making the Routh array gets terminated
- d) What is meant by asymptotes
- e) What is the need of compensator
- f) What are the merits of state variable technique


PART -B

2. a) What are the requirements for good servomotor
- b) Find the gain of the system using signal flow graph approach for a given block diagram as shown in Figure below.

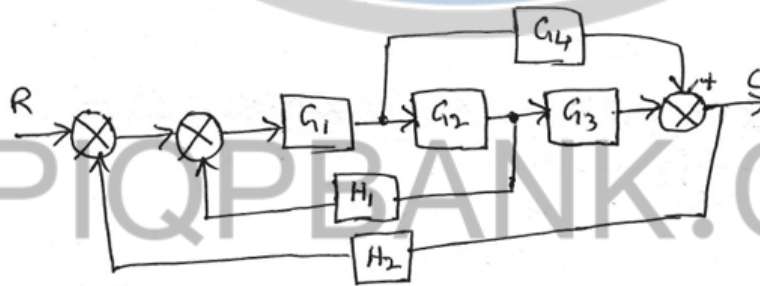

3. a) Explain time domain specification
- b) For a negative feedback control system

$$G(s) = \frac{10}{s(0.45s+1)}$$
and
$$H(s) = \frac{5}{s+4}$$
. Using generalized error series determine the steady state error of the system when the input applied is $r(t) = 1+3t+4t^2$.

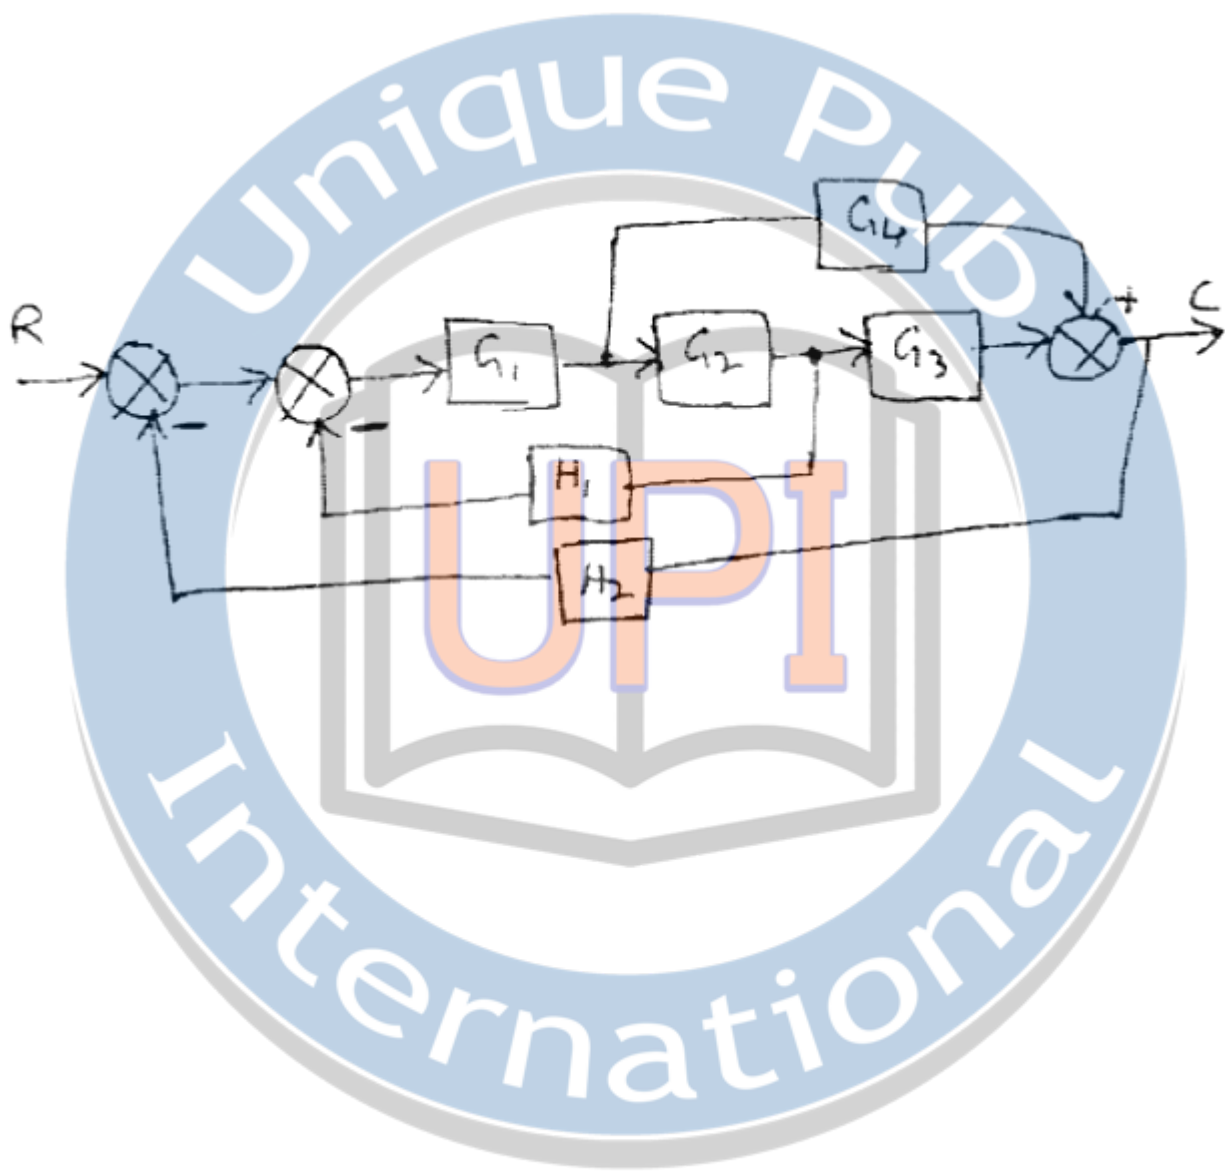

UPIQP.BANK.COM

4. a) Define and derive the breakaway point on the root locus
b) Determine the number of roots of a given polynomial with real parts between zero and -1 , $8s^2 + 44s^4 + 126s^3 + 219s^2 + 258s + 85 = 0$

5. a) Derive the relation between phase margin and damping ratio
b) Sketch the polar plot for a given open loop transfer function.

$$G(s) = \frac{10}{s(s+1)(s+3)}$$

6. A unit feedback system has an open loop transfer function

$$G(s) = \frac{K}{s(s+1)(0.2s+1)}$$

. Design a phase lag compensator to meet the following specifications.

Velocity error constant = 8

Phase margin $\geq 40^\circ$

7. a) Explain the concepts of state, state variables and state model
b) Determine the state model of the system characterized by the differential equation $(s^4 + 2s^2 + 8s^3 + 4s + 3) Y(s) = 10 U(s)$

UPIQP BANK.COM

II B. Tech II Semester Regular Examinations, April/May – 2016

CONTROL SYSTEMS

(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70


- Note: 1. Question Paper consists of two parts (**Part-A** and **Part-B**)
 2. Answer **ALL** the question in **Part-A**
 3. Answer any **THREE** Questions from **Part-B**

PART -A

1. a) Illustrate between open loop and closed loop control systems
- b) What are the standard test signals used in time domain analysis
- c) What is the effect of addition of poles on root locus
- d) What are the merits of frequency domain analysis
- e) What are the different types of electrical compensators
- f) Define the concept of state in state space analysis.

PART -B

2. a) Describe the AC servo motor and draw its torque vs speed characteristics
- b) Find the transfer function $\frac{\theta_2(s)}{T(s)}$ for a given rotational mechanical system is as shown in below figure

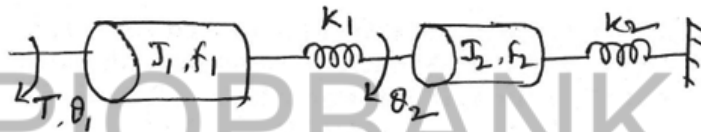

3. a) Define the steady state error and error constants of different types of inputs
 - b) A unity feedback system has a forward path transfer function $G(s) = \frac{9}{s(s+1)}$.
 Find the value of damping ratio, undamped natural frequency of the system, percentage over shoot, peak time and settling time.
4. a) Explain the special cases in Rouths stability criterion
 - b) Sketch the root locus for the characteristic equation is $s(s+1)(s+2) + k(s+1.5) = 0$

5. a) Derive the correlation between time domain and frequency domain specifications
b) Sketch the Bode plot and determine the Gain margin and phase margin

For the transfer function is given, $G(s) = \frac{10}{s(1+0.4s)(1+0.1s)}$

6. A unity feedback system has an open loop transfer function

$G(s) = \frac{K}{s(s+3)(s+10)}$ design a suitable lag compensation so that phase margin is $\geq 45^\circ$ and velocity error constant, $K_v \geq 15$

7. a) State and explain the concepts of Controllability and Observability.
b) Given $G(s) = \frac{2}{s^2 + 5s + 6}$, obtain the state space model of the system in the diagonal canonical form.

UPIQPBANK.COM

II B. Tech II Semester Regular Examinations, April/May – 2016

CONTROL SYSTEMS

(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70


- Note: 1. Question Paper consists of two parts (**Part-A** and **Part-B**)
 2. Answer **ALL** the question in **Part-A**
 3. Answer any **THREE** Questions from **Part-B**

PART -A

1. a) Define the closed loop control system with diagram
- b) What is the different between type and order of a system
- c) What are the merits of root locus
- d) What are the frequency domain specification
- e) What is the need of lead-lag compensator
- f) What is controllability

PART -B

2. a) Explain the construction and operating principle of synchro transmitter with neat diagrams
- b) Derive the transfer function $\frac{\theta_2(s)}{T(s)}$ for the given rotational mechanical system shown in below figure

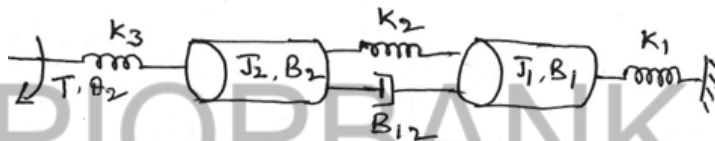

3. a) Derive the generalized error constants
- b) A unity feedback control system has a loop transfer function, $G(s) = \frac{10}{s(s+2)}$. Find the rise time, percentage overshoot, peak time and settling time for a step input of 12 units.
4. a) What are the necessary and sufficient conditions of stability for linear time invariant systems?
- b) The open loop transfer function of a unity feedback control system is given by $G(s) = \frac{k}{s(s+3)^2}$. Sketch the root locus plot of the closed loop system for positive values of k and there from determine the value of k that would make the system stable.

5. a) Discuss the calculation of gain crossover frequency and phase crossover frequency with respect to the polar plots
b) Determine the resonant frequency ω_r , resonant peak M_p and bandwidth for the system whose transfer function is

$$G(j\omega) = \frac{5}{5 + j2\omega + (j\omega)^2}$$

6. Consider the open loop transfer function with unit feedback system,

$$G(s) = \frac{k}{s(s+1)(0.5s+1)}$$

Design the lead-lag compensator so that

- a) Velocity error constant K_v is 5 sec^{-1}
b) Phase margin not greater than 40°
c) Gain margin not greater than 10 db
7. a) State and prove the properties of STM

- b) Reduce the matrix A to diagonal matrix, $A = \begin{bmatrix} 3 & -2 \\ -1 & 2 \end{bmatrix}$

UPIQP BANK.COM